

	<b>VITAL TECHNICAL SDN. BHD.</b>	  	<b>Issued date : 31/03/08</b>
	<b>Technical Data Sheet</b>		<b>Rev. No. : 6</b>
	<b>VT-141 / VT-147 / VT-192V Rapid 3 Ton 4 Minutes Epoxy</b>		<b>Revised date : 30/05/14</b>
			<b>Page : 1 of 3</b>

## Product Description

VT-141 is a rapid setting, general purpose, 1:1 mix ratio epoxy adhesive. It exhibits a remarkable combination of properties; fast setting, good resistance towards water, most solvents and automotive oils. VT-141 can be used as an adhesive on various substrates, to fill gaps and surface repairs. It can be sanded, does not shrink upon curing and does not crack if drilled. VT-141 cures clear can be handled after an hour.

## Features

- 100% solid, no solvents
- Non-shrinking
- Fast setting
- Rapid strength development
- Good resistance against solvents and common automotive oils

## Applications

Suitable for bonding metal, wood, plastic, china, ceramics, tools, and glassware.  
Not suitable for bonding of polyethylene, polypropylene, PTFE and other flexible materials.

## Directions

### Surface preparation

1. Surfaces must be clean and dry.
2. Use solvent to wipe off any dust, dirt, grease, oil or water.
3. Roughen or abrade smooth surfaces to improve the adhesion strength.

### Mixing

1. Puncture tube with the cap and squeeze out equal amounts of resin and hardener on any disposable container or surface.
2. Mix thoroughly for one minute with the mixing stick provided.

### Application

1. Apply a small amount of the adhesive on both surfaces immediately after mixing thoroughly, before it starts to gel.
2. Press together and wipe off any excess epoxy with acetone.
3. Support the bond for 15 - 30 minutes at room temperature.
4. Handling strength achieved in one hour and full cure strength in six hours.

## Caution

Contains epoxy resin, polyamine and polymercaptan hardener. May cause severe eyes and skin irritation. Avoid prolonged contact with eyes or skin. In case of contact with eyes, flush with water for 15 minutes and seek medical attention immediately. In case of skin contact, wipe off and wash with soap and water. Use in well ventilated areas.  
**KEEP OUT OF REACH OF CHILDREN.**





## Storage

Store in a dry and cool place. Not damaged by freezing. If frozen, warm to room temperature.

## Technical Data:

### Typical Uncured Properties

<b>Base</b>	<b>Part A :</b>	Epoxy resin
	<b>Part B :</b>	Polymercaptan hardener
<b>Appearance</b>	<b>Part A :</b>	Clear liquid

	<b>VITAL TECHNICAL SDN. BHD.</b>	  	Issued date : 31/03/08
	Technical Data Sheet		Rev. No. : 6
	VT-141 / VT-147 / VT-192V Rapid 3 Ton 4 Minutes Epoxy		Revised date : 30/05/14
			Page : 2 of 3

<b>Viscosity<sup>1</sup></b>	<b>Part B</b> :	Slightly yellowish clear liquid
	<b>Part A</b> :	6,000 - 12,000 cPs
<b>Density<sup>2</sup></b>	<b>Part B</b> :	9,000 - 15,000 cPs
	<b>Part A</b> :	approximately 1.16 g/mL (9.7 lb/gal)
	<b>Part B</b> :	approximately 1.13 g/mL (9.4 lb/gal)
<b>Mix ratio (R:H) by weight</b>	:	1:1
<b>Mix ratio (R:H) by volume</b>	:	1:1
<b>Gel time (10 g)<sup>3</sup></b>	:	3 - 5 minutes (depending on the adhesive amount and temperature)
<b>Application temperature</b>	:	15 - 35 °C (59 - 95 °F)
<b>Set time</b>	:	10 - 20 minutes
<b>Time to handling strength</b>	:	1 hour
<b>Time to full strength</b>	:	6 hours
<b>Exotherm</b>	:	100 - 130 °C (248 - 284 °F)
<b>Shelf life</b>	:	12 months from day of delivery (if stored correctly)

### Typical Cured Properties

<b>Colour</b>	:	Clear to slightly yellowish
<b>Shore D hardness (1 day)<sup>4</sup></b>	:	75 - 85

### **Rate of strength build up, single lap shear strength (anodised aluminium, etched)<sup>5</sup>**

- 1 hour	:	~30% full strength, 4.2 ± 0.7 N/mm <sup>2</sup> (609 ± 101 psi)
- 4 hours	:	~90% full strength, 12.1 ± 0.8 N/mm <sup>2</sup> (1755 ± 116 psi)
- 6 hours	:	13.0 ± 0.4 N/mm <sup>2</sup> (1885 ± 58 psi)
- 1 day	:	13.1 ± 0.6 N/mm <sup>2</sup> (1900 ± 87 psi)
- 14 days	:	13.0 ± 0.5 N/mm <sup>2</sup> (1885 ± 72 psi)
- 28 days	:	13.2 ± 0.3 N/mm <sup>2</sup> (1914 ± 44 psi)

### **Solvent resistance, single lap shear strength (anodised aluminium, etched)<sup>5</sup>**


#### 7 days RT cure, immersion for 7 days

- Isopropanol	:	8.4 ± 0.6 N/mm <sup>2</sup> (1218 ± 87 psi)
- Acetone	:	8.8 ± 0.6 N/mm <sup>2</sup> (1276 ± 87 psi)
- Petrol	:	10.8 ± 1.1 N/mm <sup>2</sup> (1566 ± 160 psi)
- Motor oil	:	12.3 ± 1.0 N/mm <sup>2</sup> (1784 ± 145 psi)

### **Water resistance, single lap shear strength (anodised aluminium, etched)<sup>5</sup>**

#### 7 days RT cure

- 1 day immersion	:	9.7 ± 0.6 N/mm <sup>2</sup> (1406 ± 87 psi)
- 7 days immersion	:	9.6 ± 0.8 N/mm <sup>2</sup> (1392 ± 116 psi)

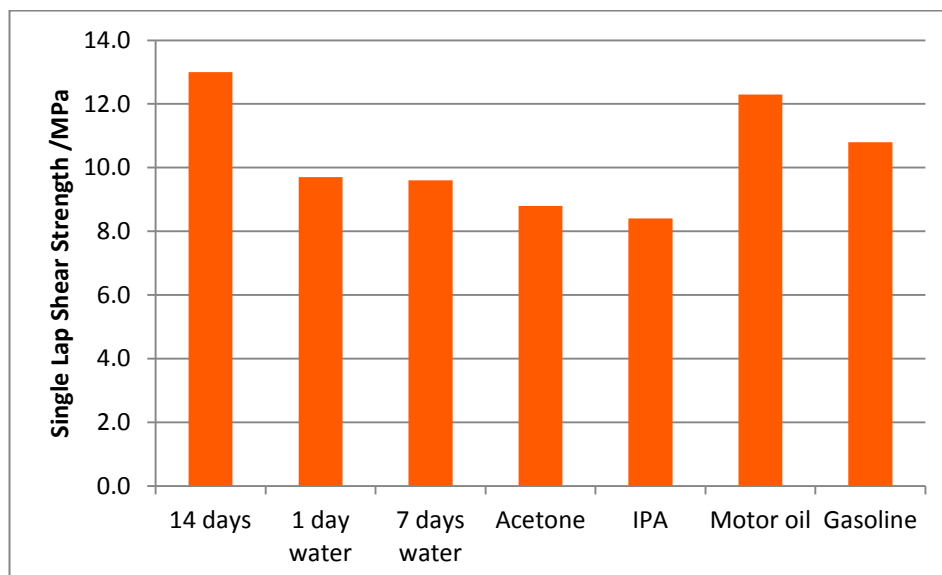

	<b>VITAL TECHNICAL SDN. BHD.</b>	  	<b>Issued date : 31/03/08</b>
	<b>Technical Data Sheet</b>		<b>Rev. No. : 6</b>
	<b>VT-141 / VT-147 / VT-192V Rapid 3 Ton 4 Minutes Epoxy</b>		<b>Revised date : 30/05/14</b>
			<b>Page : 3 of 3</b>

<sup>1</sup> Tested according to ASTM D2196 (LV3, 5 rpm).

<sup>2</sup> Measured according to modified ASTM D1875.

<sup>3</sup> Tested according to DOTD TR 703-85 Method A.

<sup>4</sup> Tested according to modified ASTM D2240 (Cylindrical sample; diameter = 51mm; thickness = 3mm).

<sup>5</sup> Aluminium coupon prepared and tested according to ASTM D1002; surface treated according to ASTM D2651.

### Order information

Code No.	Packaging size
VT-141	28.4 g/set
VT-14118K	1.8 kg/set
VT-147	20 g/set
VT-192V	10g x 6

Every endeavour has been made to ensure that the information given herein is true and reliable but it is given only for the guidance of our customers. The company will not accept any responsibility for the loss or damage that may result from the use of the information, due to the possibility of various of processing or working conditions and of workmanship outside our control. Users are advised to confirm suitability of this product by their own tests.

- END -